


### Ethernet to Fiber Transceiver (switch)

- Supports standard Ethernet inputs up to 1 Gbit
- 3 port Ethernet switch (1 fiber, 2 electrical)
- Auto (10/100/1000) electrical port speed detection
- Manually force 10Mbit electrical speed (if needed)
- Fiber transceiver speed always 1 Gbit
- Auto or manual electrical crossover selection
- Singlemode fiber 1310nm up to 10km (6.2 miles)
- Multimode fiber 850nm up to 550m (1,804 feet)
- Duplex LC optical connections
- Supports hot swapping and hot plugging

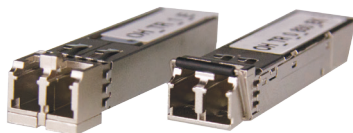


Singlemode SFP    Multimode SFP

Using the same basic module we provide two versions suitable for singlemode or multimode fiber. Each version has a different SFP installed.

The OET 1510 is a compact 3 port Ethernet switch, designed to extend the reach of electrical Ethernet signals over long distances using a constant (fixed) high speed 1 Gbit optical transceiver speed.

When paired with another OET 1510 at the receiving end (using two fiber links) you have a cost-effective Ethernet extender system for distances up to 10km providing a stable, high speed 1Gbit error free optical connection between locations.

The OET 1510 has two standard RJ45 electrical Ethernet ports plus fiber I/O and functions as a 3 port Ethernet switch. For legacy system use; each electrical Ethernet port can be set for automatic speed detection (10/100/1000) or forced to 10Mbit, and each port can use auto crossover detection or be forced manually if needed. These functions are available using the dip switch.

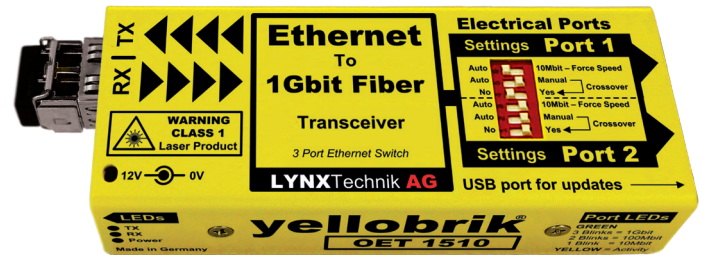


### Technical Specifications


<b>Ethernet</b>	2 x Ethernet ports, RJ 45 Connectors. 10 BaseTUTP category 3,4 or 5 cable up to 328ft/100m (2 pairs) 100 BaseTXUTP category 5 cable up to 328ft/100m (2 pairs) 1000 BaseTXUTP category 5 cable up to 328ft/100m (4 pairs) <hr/> Auto detect bit rate (10/100/1000), or force to 10Mbit for each port (selectable) <hr/> Automatic crossover detection or force manually for each port (selectable) <hr/> Port speed / activity LED indication (next to Ethernet port)
<b>Fiber Optic</b>	1 x fiber optic input (TX) 1 x fiber optic output (RX) Duplex using LC/PC Connections <hr/> IEEE 802.3z (1000BASE-X Gbit/s Ethernet over Fiber at 1 Gbit/s (125 MB/s) <hr/> <b>Singlemode Version</b> TX wavelength 1310nm, power -3dBm RX input range 1260nm to 1620nm, sensitivity -3dBm to -21dBm Max distance 10km (6.2miles) <hr/> <b>Multimode Version</b> TX wavelength 850nm, power -2dBm to -7dBm RX input 850nm sensitivity 0dBm to -15dBm Max distance approx 550m (1804 feet) <hr/> Fiber TX active and RX active LEDs on side of module
<b>Power</b>	+12VDC @ 2.2W nominal - ( supports 7 - 15VDC input range )
<b>Physical</b>	Size: 120mm x 42mm x 22mm (4.73" x 1.65" x 0.86") including connectors Weight: 125g (4.4oz)
<b>Ambient</b>	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
<b>Model #</b>	OET 1510 (singlemode) - ( EAN# 4250479315129 ) OET 1510 MM (multimode) - ( EAN # 4250479321144 )
<b>Includes</b>	Module, AC power supply

### Fiber Adapter Options (singlemode only not multimode)

These adapter kits allow the use of ST or SC fiber connections on the module. SMF 0.5m (19.6") tail introduces less than 0.25dB attenuation.



Model# **LC/SC DUP**  
LC/PC to SC/PC Adapter



Model# **LC/ST DUP**  
LC/PC to ST/SC Adapter

### Power Adapter Options

The kit **INCLUDES** AC power supplies. The power adapters below are optional.



**P-TAP 1000**  
Use with a standard battery P-TAP power source.



**XLR 1000**  
Use with a standard 4 pin XLR camera battery power source.

Specifications subject to change