

RM-LP25U


Remote Control Panel

New Product News



- Local remote control panel for cameras
GY-HD251 / 201 / 200
- Operator control panel (OCP) for RM-HP250DE
camera control unit
- Joystick dual control of auto iris level and master black
- Rackmountable

- F stop LED Indication
- 5 user memory scene file settings
- 5m captive cable
- Extension cable accessory options
- Compatible with Camplex CP-301C base station

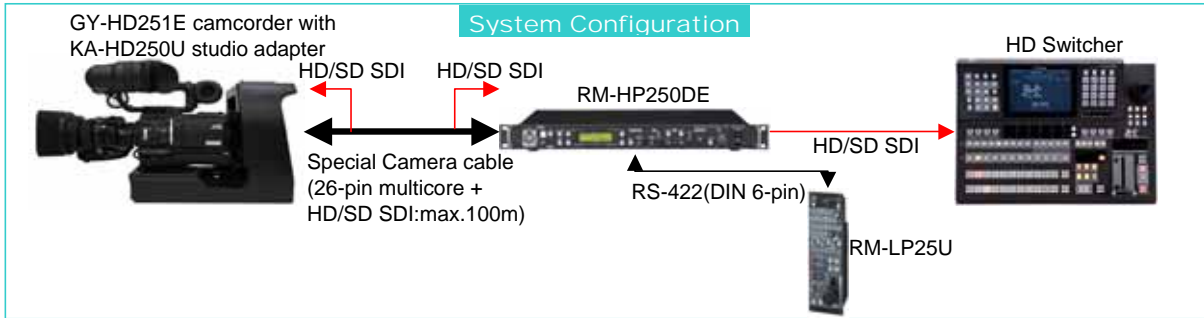

Specifications

Functions

Bars: ON/OFF

Scene files: 5 memories

Shutter: Normal, 1/100(120), 1/250, 1/500, 1/1000, 1/2000, Variable *1

Gain: 0dB, 3dB, 6dB, 9dB, 12dB, 15dB, 18dB, -3dB *1, -6dB *1, LoLux *1, ALC, Variable *1

Gamma: Level control *2

Detail: Level control

Knee: Knee point control

White balance: Manual, Preset, FAW, AW A, AW B

Black: Stretch, Compress

White control: Auto White, B level control, R level control

Black control: Auto Black, B level control, R level control *2

Iris: Auto iris level (Joy stick), Auto, Full, Preset, Preset level control,

F number display *2

Tally: Preview, Call

Master black: Level control (Joy stick)

Operation lock: Full, Part, OFF

Cable: DIN 6-pin, 5m Captive

General

Power requirements: DC 9 V (from CCU)

Power consumption: 2 W

Operating temperature: +5 degrees to +40 degrees

Storage temperature: -20 degrees to +60 degrees

Operating humidity: Less than 80%


Dimensions (W x H x D): 105 x 77 x 310 mm (excluding joystick)

Mass: Approx. 2.0 kg

Note *1: Does not apply to GY-HD251/ HD201/ HD200

Note *2: Firmware upgrade required for GY-HD251/ HD201/ HD200

Dimensions

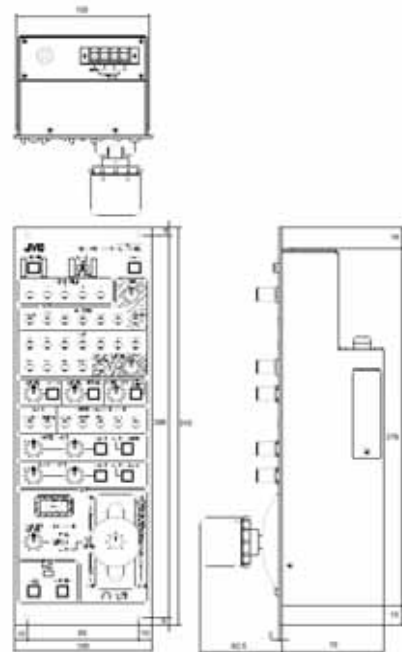

Options



Remote control unit
RM-HP250DE

Special 26-pin cable
with HD/SD SDI
HK-VC10: 10m
HK-VC20: 20m
HK-VC25: 25m
HK-VC100: 100m

Camera cable
VC-P110U: 5m
VC-P112U: 20m
VC-P113U: 50m
VC-P114U: 100m
(analog video I/F only)

Cable coupler
KA-280U
(for VC-P110U/P112U/P113U/P114U)

DISTRIBUTED BY

Design and specifications subject to change without notice.